

Version GYGY-V1.0

Optical Fibre Cable Technical Specification

Duct Cable GYGY-12/24OM4

Yangtze Optical Fibre and Cable Joint Stock Limited Company

All rights reserved

Customer Approval			
	Name	Signature	24/09/2026
Approved by			

1. General

1.1 Scope

This Specification covers the design requirements and performance standard for the supply of optical fibre cable in the industry. YOFC ensures a stable quality control system for our cable products through several programs including ISO 9001, ISO 14001 and OHS.

Cable type	Application
GYGY-12/24OM4	Duct installation

1.2 Reference

The cable offered by YOFC are designed, manufactured and tested according to the standards as follows:

ITU-T G.651	Characteristics of a multi-mode optical fibre
IEC 60794-1-1	Optical fibre cables - part 1-1 - Generic specification-General
IEC 60794-1-21	Optical fibre cables - part 1-2 - Generic specification-Basic optical cable test procedure-Mechanical test methods
IEC 60794-1-22	Optical fibre cables - part 1-2 - Generic specification-Basic optical cable test procedure-Environmental test methods
IEC 60794-3	Optical fibre cables - part 3 - Sectional specification-Outdoor cables
IEC 60794-3-10	Optical fibre cables- part 3-10: Outdoor cables-Family specification for duct and direct buried optical communication cables
IEC 60794-3-11	Optical fibre cables- part 3-11: Outdoor cables-Detailed specification for duct and directly buried single-mode optical fibre telecommunication cables

1.3 Life Time

Optical fibre cables supplied in compliance with this specifications is capable to withstand the typical service condition for a period of twenty-five (25) years without detriment to the operation characteristics of the cable.

1.4 Application

Item	Value
Operation temperature	-40°C~+70°C
Installation temperature	-40°C~+70°C
Storage temperature	-40°C~+70°C
Static bending radius	10 times the cable diameter
Dynamic bending radius	20 times the cable diameter

2. Optical Fibre

Optical Fibres supplied in this specification meet the requirements of ITU-T G651


Parameter	Specification
Core Diameter	$50 \pm 2.5 \mu\text{m}$
Cladding diameter	$125 \pm 1.0 \mu\text{m}$
Fibre diameter	235~255 μm , with UV coating, and colored to: $250 \pm 15 \mu\text{m}$
Core/cladding concentricity error	$\leq 1.0 \mu\text{m}$
Coating/cladding concentricity error	$\leq 10.0 \mu\text{m}$
Core non circularity	$\leq 5.0\%$
Cladding non circularity	$\leq 0.6\%$
Numerical Aperture	0.200 ± 0.015
Attenuation coefficient	850 nm: 2.8 dB/km max after cabling 1300 nm: 1.0 dB/km max after cabling
Overfilled Modal Bandwidth after cable	850 nm: $\geq 3500 \text{ MHz} \cdot \text{km}$ 1300 nm: $\geq 500 \text{ MHz} \cdot \text{km}$
Bending-loss performance of optical fibre (2 turns@ 15 mm radius)	850nm : $\leq 0.1 \text{ dB}$ 1300nm : $\leq 0.3 \text{ dB}$
Zero-dispersion wavelength (λ_0)	1295~1340 nm
Zero-dispersion slope (S_0)	1295nm $\leq\lambda_0\leq$ 1310nm: $\leq 0.105 \text{ ps}/(\text{nm}^2 \cdot \text{km})$ 1310nm $\leq\lambda_0\leq$ 1340nm: $\leq 0.000375(1590-\lambda_0) \text{ ps}/(\text{nm}^2 \cdot \text{km})$
Proof test stress	$\geq 100 \text{ kpsi}(0.69 \text{ GPa})$

3. Optical Cable

3.1 Technical Characteristics

- The unique second coating and stranding technology provide the fibres with enough space and bending endurance, which ensure good optical property of the fibres in the cable
- Accurate process control ensures good mechanical and temperature performance
- High quality raw material guarantees the long service life of cable

3.2 Cross Section of Cable

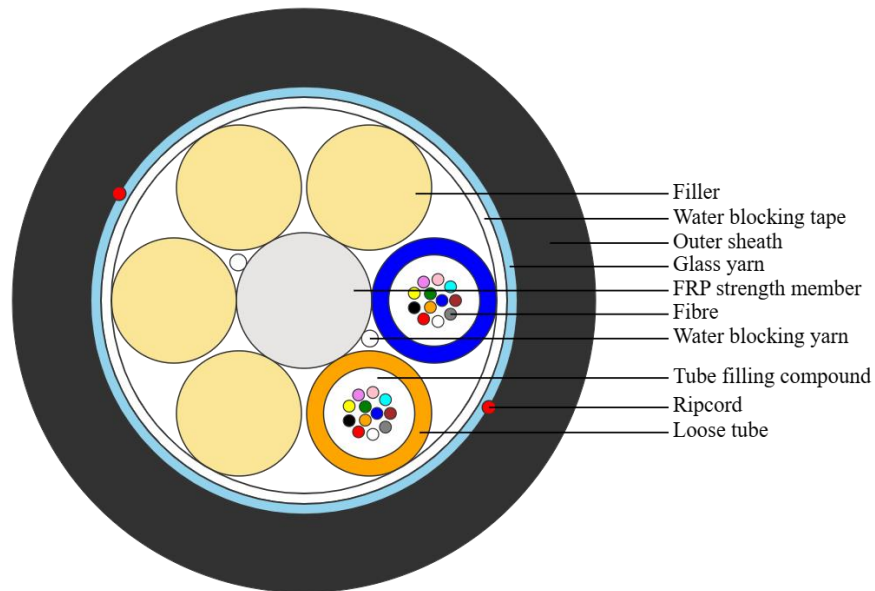

GYGY-240M4

Schematic for reference only

Structure of other fibre counts refer to 3.4

3.3 Fibre and Loose Tube Identification

The color code of fibres and loose tube will be identification in accordance with the following color sequence, other sequence also is available.

	1	2	3	4	5	6
Color code	Blue	Orange	Green	Brown	Grey	White
	7	8	9	10	11	12
	Red	Black	Yellow	Violet	Pink	Aqua

The color of the fillers will be natural.

3.4 Dimensions and Descriptions

The standard optical cable structure is shown in the following table, other structure and fibre count are also available according to customer requirements.

Item	Contents	Value
		12/24
Structure	Type	1+6
Loose tube	Fibre count/tube	12
	Outer diameter (mm)	2.4
Central strength member	Material	FRP
	Diameter (mm)	2.6
	Coated diameter (mm)	/
Water blocking	Material	Water blocking yarn and tape
Peripheral strength member	Material	Glass yarn
Outer Sheath	Material	HDPE
	Color	Black
	Thickness (mm)	Nominal: 1.5
Ripcord	Color	Red
	Number	2
Cable diameter(mm) Approx.		11.0
Cable weight(kg/km) Approx.		95

3.5 Main Mechanical Performance

Item	Tension(N)	Crush(N/100mm)
12/24	2700	2200

4. Mechanical, Physical and Environmental Test Characteristics

The mechanical and environmental performance of the cable are in accordance with the following table. Unless otherwise specified, all attenuation measurements required in this section shall be performed at 1300 nm.

Items	Test Method	Requirements
Tension	<u>IEC 60794-1-21-E1</u> Load: According to 3.5 Sample length: Not less than 50 m Duration of load: 1 min	Additional attenuation: ≤ 0.4 dB after test No damage to the outer jacket or inner elements
Crush	<u>IEC 60794-1-21-E3</u> Load: According to 3.5 Duration of load: 1 min	Additional attenuation: ≤ 0.4 dB after test No damage to the outer jacket or inner elements
Impact	<u>IEC 60794-1-21-E4</u> Radius: 300 mm Impact energy: 10 J Number of impacts: 1 Impact points: 3	Additional attenuation: ≤ 0.4 dB No damage to the outer jacket or inner elements
Repeated bending	<u>IEC 60794-1-21-E6</u> Bending radius: $20 \times D$ Cycles: 25 Load: 150 N	Additional attenuation: ≤ 0.4 dB No damage to the outer jacket or inner elements
Torsion	<u>IEC 60794-1-21-E7</u> Cycles: 10 Length under test: 1 m Turns: $\pm 180^\circ$ Load: 150 N	Additional attenuation: ≤ 0.4 dB No damage to the outer jacket or inner elements
Water penetration	<u>IEC 60794-1-22-F5</u> Duration: 24 h Sample length: 3 m Water height: 1 m	No water leakage.
Temperature cycling	<u>IEC 60794-1-22-F1</u> Sample length: At least 1000 m Temperature range: -40°C to $+70^\circ\text{C}$ Cycles: 2 Dwell time: 12 h	The change in attenuation coefficient shall be less than 0.4 dB/km
Other parameters	According to <u>IEC 60794-1</u>	

5. Packaging and Drum

5.1 Cable Sheath Marking

Unless otherwise specified, the cable sheath marking shall be as follows:

Color: white

Contents: YOFC, the year of manufacture, the type of cable, cable number, length marking

Interval: 1m

Outer sheath marking legend can be changed according to user's requests.

5.2 Reel Length

Standard reel length: 2/3 km/reel, other length is also available.

5.3 Cable Drum

The cables are packed in fumigated wooden drums.

5.4 Cable Packing

Both ends of the cable will be sealed with suitable plastic caps to prevent the entry of moisture during shipping, handling and storage. The inner end is available for testing.