


BELLCORE TESTED

Bellcore AU-639



Yak-10 Connector

- ★ The double U- contact cuts through the insulation and tightly grips the conductors and makes a gas - tight, solder equivalent connection.
- ★ The YAK-10 connector accepts any conductor combination of 0,4 mm 0,9 mm (26 19 AWG) diameter with a maximum insulation O.D. of 2,10 mm.
- ★ The YAK-10 connector is filled with a sealant, which protects connected conductors and U - contact from water and moisture, thus exceeding the life of the connection.
- ★ Due to size of YAK-10 connectors splicing O.D. is apparently less compared to other connectors.

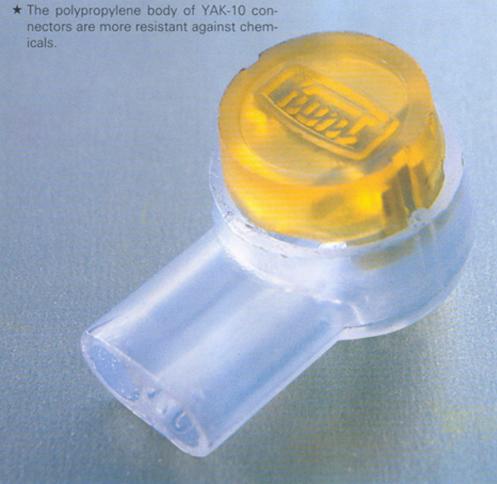

PRODUCT VARIATIONS

CODE DESCRIPTION

Yak-10 2 wire filled butt type connector Yak-10D 2 wire unfilled butt type connector

Yak-10F 2 wire untilled flame retardant (UL 94V-0) butt type connector

Connector	Wire Diameter		max. insulation	length x width x height	
Type	mm	AWG	outer diameter	mm	inch
Yak-10	0.4 - 0.9	26 - 19	2,1 mm / 0,826 in.	16,4 x 12 x 5,9	0,65 x 0,05 x 0,23
Yak-10D	0.4 - 0.9	26 - 19	2,1 mm / 0,826 in.	16,4 x 12 x 5,9	0,65 x 0,05 x 0,23
Yak-10F	0.4 - 0.9	26 - 19	2,1 mm / 0,826 in.	16,4 x 12 x 5,9	0,65 x 0,05 x 0,23

PACKING INFORMATION

вох			BOX			
Code Quantity			Size	Quantity	Size	
		cm	inch		cm	inch
Yak-10	100	5 x 5 x 5	1,97 x 1,97 x 1,97	10000	26 x 26 x 22,5	10,2 x 10,2 x 8,9
Yak-100	100	5 x 5 x 5	1,97 x 1,97 x 1,97	10000	26 x 26 x 22,5	10,2 x 10,2 x 8,9
Yak-10F	100	5 x 5 x 5	1,97 x 1,97 x 1,97	10000	26 x 26 x 22,5	10,2 x 10,2 x 8,9

BOX			BOX				
Code	Quantity S		ize	Quantity	Size		
		cm	inch		cm	inch	
Yak-10	500	8.5 x 7.5 x 9	3.3 x 2.9 x 3.5	5000	20 x 40 x 10	7,9 x 15,7 x 3,9	
Yak-100	500	8,5 x 7,5 x 9	3,3 x 2,9 x 3,5	5000	20 x 40 x 10	7,9 x 15,7 x 3,9	
Yak-10F	500	8,5 x 7,5 x 9	3,3 x 2,9 x 3,5	5000	20 x 40 x 10	7,9 x 15,7 x 3,9	





Important Notice To Purchaser:

All statements, technical information and recommendations contained herein are based on tests we believe to be reliable, but the accuracy or completeness thereof is not guaranteed, and the following is made in lieu of all warranties, expressed or include:

Seller's and manufacturer's only obligation shall be to replace such quantity of the product proved to be defective. Neither seller nor manufacturer shall be liable for any injury, loss or damage, direct or consequential, arising out of the use of or the inability to use the product. Before using, user shall determine the

suitability of the product for his intended use, and user assumes all risk and liability whatsoever in connection therewish.

No statement or recommendation not contained herein shall have any force or effect unless in an agreement signed by officers of seller and manufacturer.



Address: İkitelli Organize Sanayi Sitesi Turgut Özal Cad. No: 216

34670 lkitelli-Istanbul : 90 212 549 74 74

Tel : 90 212 549 74 74 Fax : 90 212 549 74 75 Internet : www.Kunt.com.tr